

The Agatec CPL50 is a cross line laser with built-in 180° plumb beam, ideal for floor-to-ceiling point transfer.

It also has horizontal and vertical fan angles, cross line, and locked line angle in manual mode which allows you to match an angle between any two points.

It features pulse mode for outdoor detector use (optional).




Delivered with drywall adaptor, especially designed for studs installation, and swivel mount, for inclined levels.

- **High visibility cross line, with plumb up and down**
- **Full package, with swivel and magnetic multi use mount**
- **It works also outdoor, with laser receiver (optional)**



INCLUDES

Laser, multi use mount, swivel mount, pouch, 3 x AA batteries

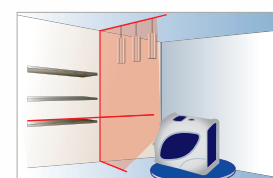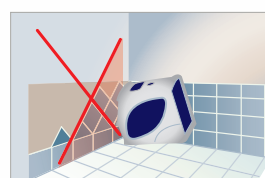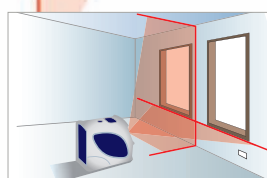

RECOMMENDED ACCESSORIES

LS30. Laser receiver that enables reception in very bright light conditions, or at long distance.



Pole mount. For floor to ceiling applications.

SPECIFICATIONS

Art. No. 775208


Range	30 m indoor 50 m outdoor with detector LS30
Accuracy	± 2 mm at 10 m
Self-leveling range	± 5°
Cross line	130° horizontal & 140° vertical fan angles
Plumb	Floor to ceiling
Power	3 x AA batteries
Battery life	25 hrs. 1-beam operation; 12 hrs. with 2 beams
IP	IP54
Weight w/o batteries, mount	470 g
Size	110 x 57 x 97 mm
Warranty	2 years

The Agatec CL30 is a self-leveling laser with a highly visible 90° cross line for all interior applications.

It has four line options: horizontal fan angle, vertical fan angle, cross line, and locked line angle in manual mode which allows you to match an angle between any two points.

Applications: installing ceilings, walls, walls tile, hanging cabinets, shelving, electrical boxes.

- **High lines visibility**
- **Very easy to operate, one button tool**
- **For any professional indoor applications**

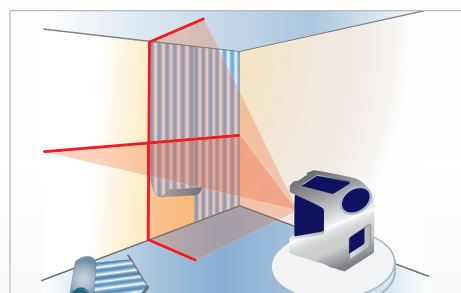

Ideal for alignment works, as tiles and cabinet installation



INCLUDES
Laser, pouch, 3 x AA batteries



Agatec SAS - Part of Hexagon Group
21, Bd Littré, 78600 Le Mesnil-le-Roi, France
Tel. +33 1 34 93 35 80 - Fax +33 1 34 93 35 89
info@agatec.com - www.agatec.com

SPECIFICATIONS	Art. No. 775207
Range	30 m
Accuracy	± 3 mm at 10 m
Self-leveling range	± 4°
Cross line	130° H & V fan angles
Power	3 x AA batteries
Battery life	25 hrs. 1-beam operation; 12 hrs. with 2 beams
IP	IP54
Weight w/o batteries, mount	310 g
Size	84 x 62 x 90 mm
Warranty	2 years